



Pict. 1: GLW 25-G/03



Pict. 2: GLWM 25-J

Wall mount unit with extendable and self-retracting belt for temporary or permanent blocking of certain areas or controlling the flow of people.

Small – compact – effective.

TECHNICAL SPECIFICATIONS

Case:	Metal, different standard colours available, also brushed stainless steel and chromed
Case height:	approx. 122 mm
Case width:	approx. 120 mm
Case depth:	approx. 75 mm
Weight:	approx. 1 kg
Tape width:	approx. 50 mm
Max. tape extension	either 2300 mm or 4000 mm
Max. tape extension (refl. stripe):	either 2300 mm or 3500 mm
Assembling:	Screwing or magnetic fixation (=GLWM 25/45)




CASE COLOUR



BELT COLOUR

Different standard colours available.
Special colours and digital printing upon request.

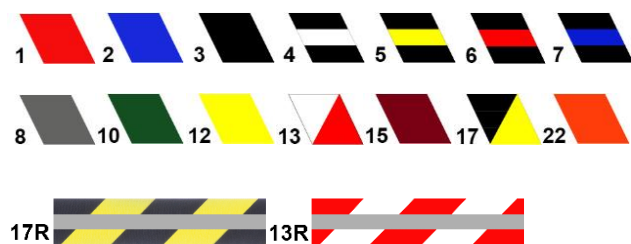

PRODUCT SAFETY DATASHEET

Product name:	see product data sheet
Article number:	see product data sheet
Manufacturer:	R. Scholz GmbH & Co. KG
Address:	Boschweg 34, 48351 Everswinkel
Telephone number:	+49 (0) 25 82 / 90 28 700
Electronic Address:	info@rs-guidesystems.de

PRODUCT DESCRIPTION

Variable or stationary barrier module with extendable and automatically retracting belt.

APPLICATION

For temporary or permanent blocking of certain areas or controlling the flow of people.

SAFETY INFORMATION

- This is not a toy.
- Use on suitable surfaces (e.g. walls, pillars, posts) for safe use.
- Do not extend the tape beyond the maximum length.
- After extending the tape to the desired length, ensure that the tape end is properly attached to a suitable counterpart.
- Despite slow restrictor and automatic rewind feature, always guide the tape back by hand until full retraction.
- Materials: Metal, plastic, (partly recycled).

HAZARD WARNINGS

- No known hazards if used and operated as intended.
- Improper use or incorrect handling can lead to injuries to the operator or in the surrounding area.
- Do not open the belt unit! The tape retraction is based on a spring/tension system with extremely high tension and may spring apart uncontrollably when being opened!
- Choking hazard for small parts.

INSTRUCTION FOR USE

- Check for damage before use.
- Do not use if damaged or worn.

- Install the barrier device at the selected location.
- Pull out and attach the tape end to a suitable counterpart.

CARE INSTRUCTIONS

- If necessary, wipe with a damp cloth.
- Do not drown in water.
- Allow wet webbing to dry before retracting.

DISPOSAL INSTRUCTIONS

- The product should be disposed of in accordance with the local waste regulations. Individual components can be recycled separately.

CONTACT INFORMATION

The **RS-GUIDESYSTEMS**-Team will be happy to answer any questions or provide further information on demand.